



# Model -DF140A1 : D Type LyTec Fiber (AQUA) D 型麗特冷光綫 (水藍色)

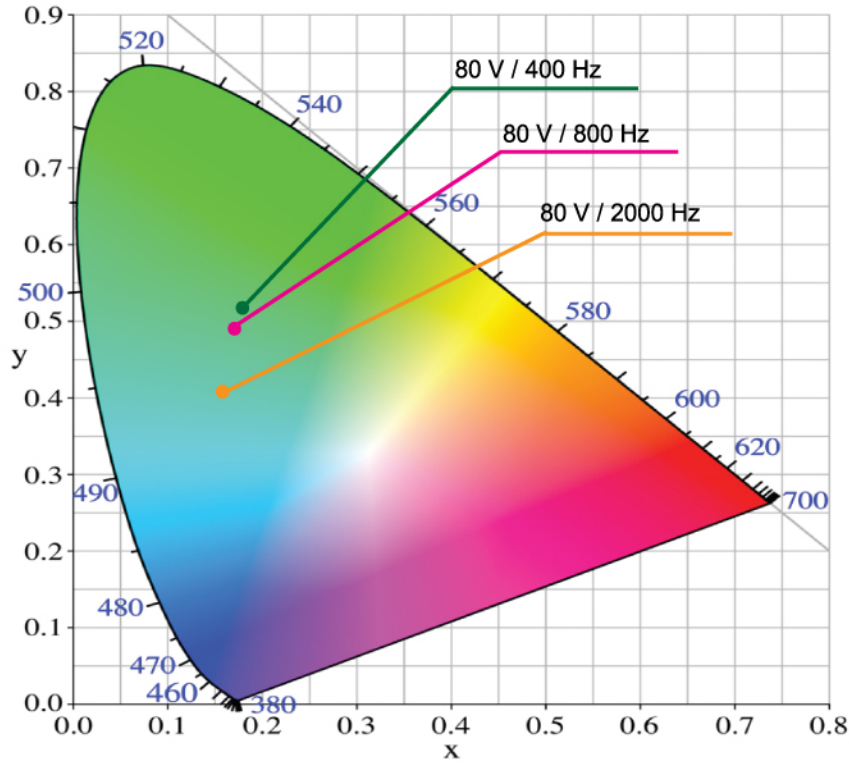

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.173	0.525
80V / 800Hz	0.169	0.492
80V / 2000Hz	0.160	0.413

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

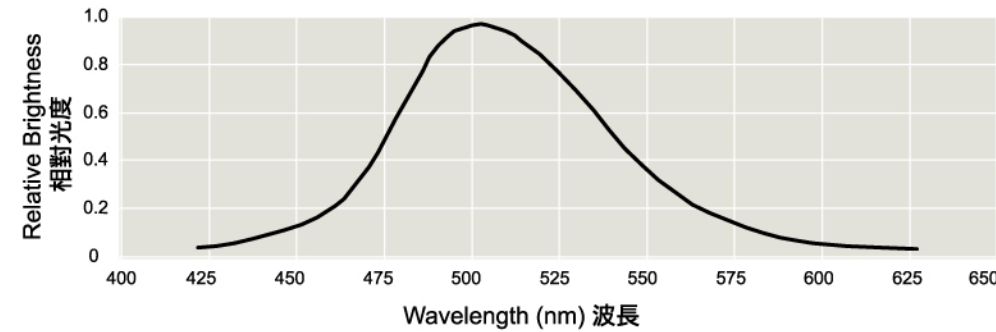

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	7.0	11.0	17.0	22.0
50V	-	14.0	22.5	34.5	44.5
60V	-	24.0	37.5	56.5	72.5
70V	-	35.5	55.5	85.5	107.5
80V	-	47.0	76.0	117.0	157.0

Typical Initial Reference Brightness 冷光綫始光度參考值

