



Model - GP123D1 : General Purpose LyTec Fiber (DEEP RED) 通用型麗特冷光綫 (深紅色)

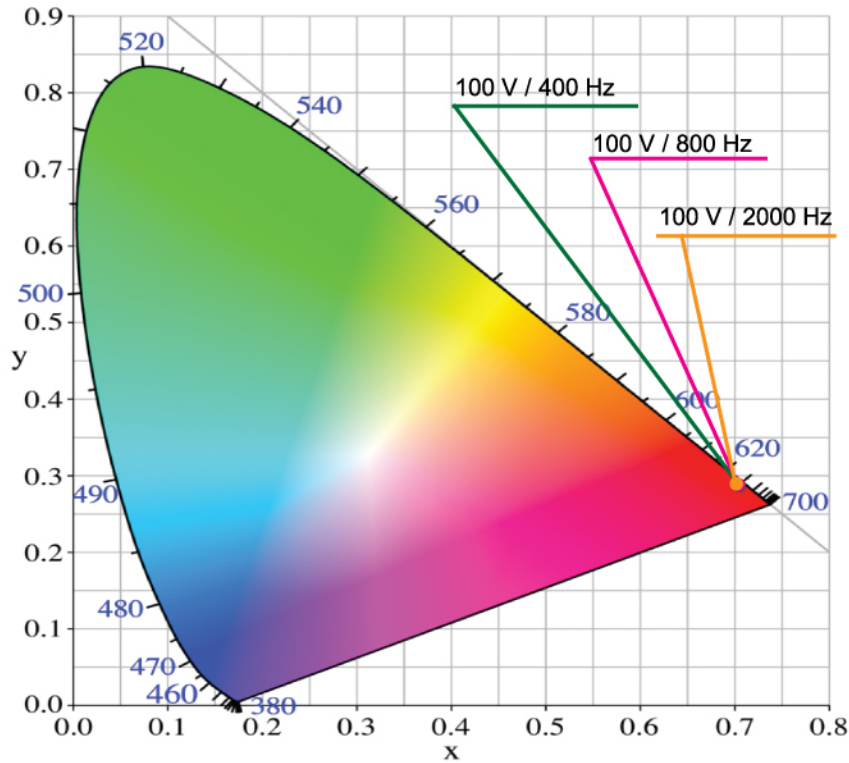

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
100V / 400Hz	0.704	0.293
100V / 800Hz	0.704	0.293
100V / 2000Hz	0.705	0.293

Fiber Spectrum at 100V/2000Hz 冷光綫光譜在100伏/2000赫茲

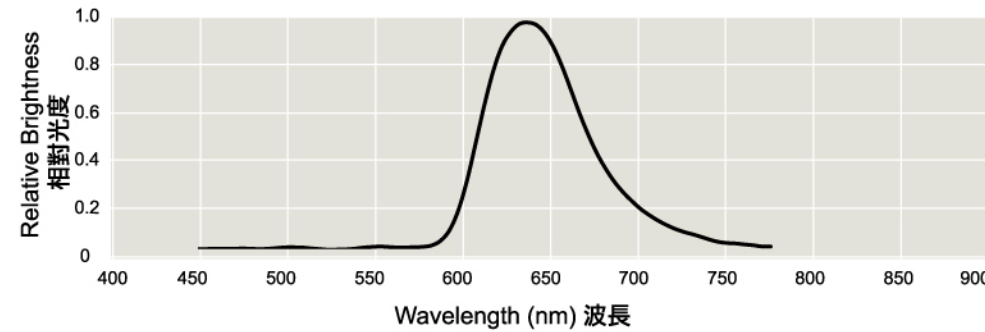

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	0.1	0.2	0.3	0.6	0.8
60V	0.8	1.4	2.1	3.8	5.6
80V	2.1	3.6	6.0	10.9	16.6
100V	3.9	7.0	11.1	22.3	34.0
120V	6.1	10.8	17.8	35.7	54.5

Typical Initial Reference Brightness 冷光綫始光度參考值

