




# Model - WF235A1 : Twin Lead LyTec Fiber (AQUA)


## 雙芯綫麗特冷光綫 (水藍色)

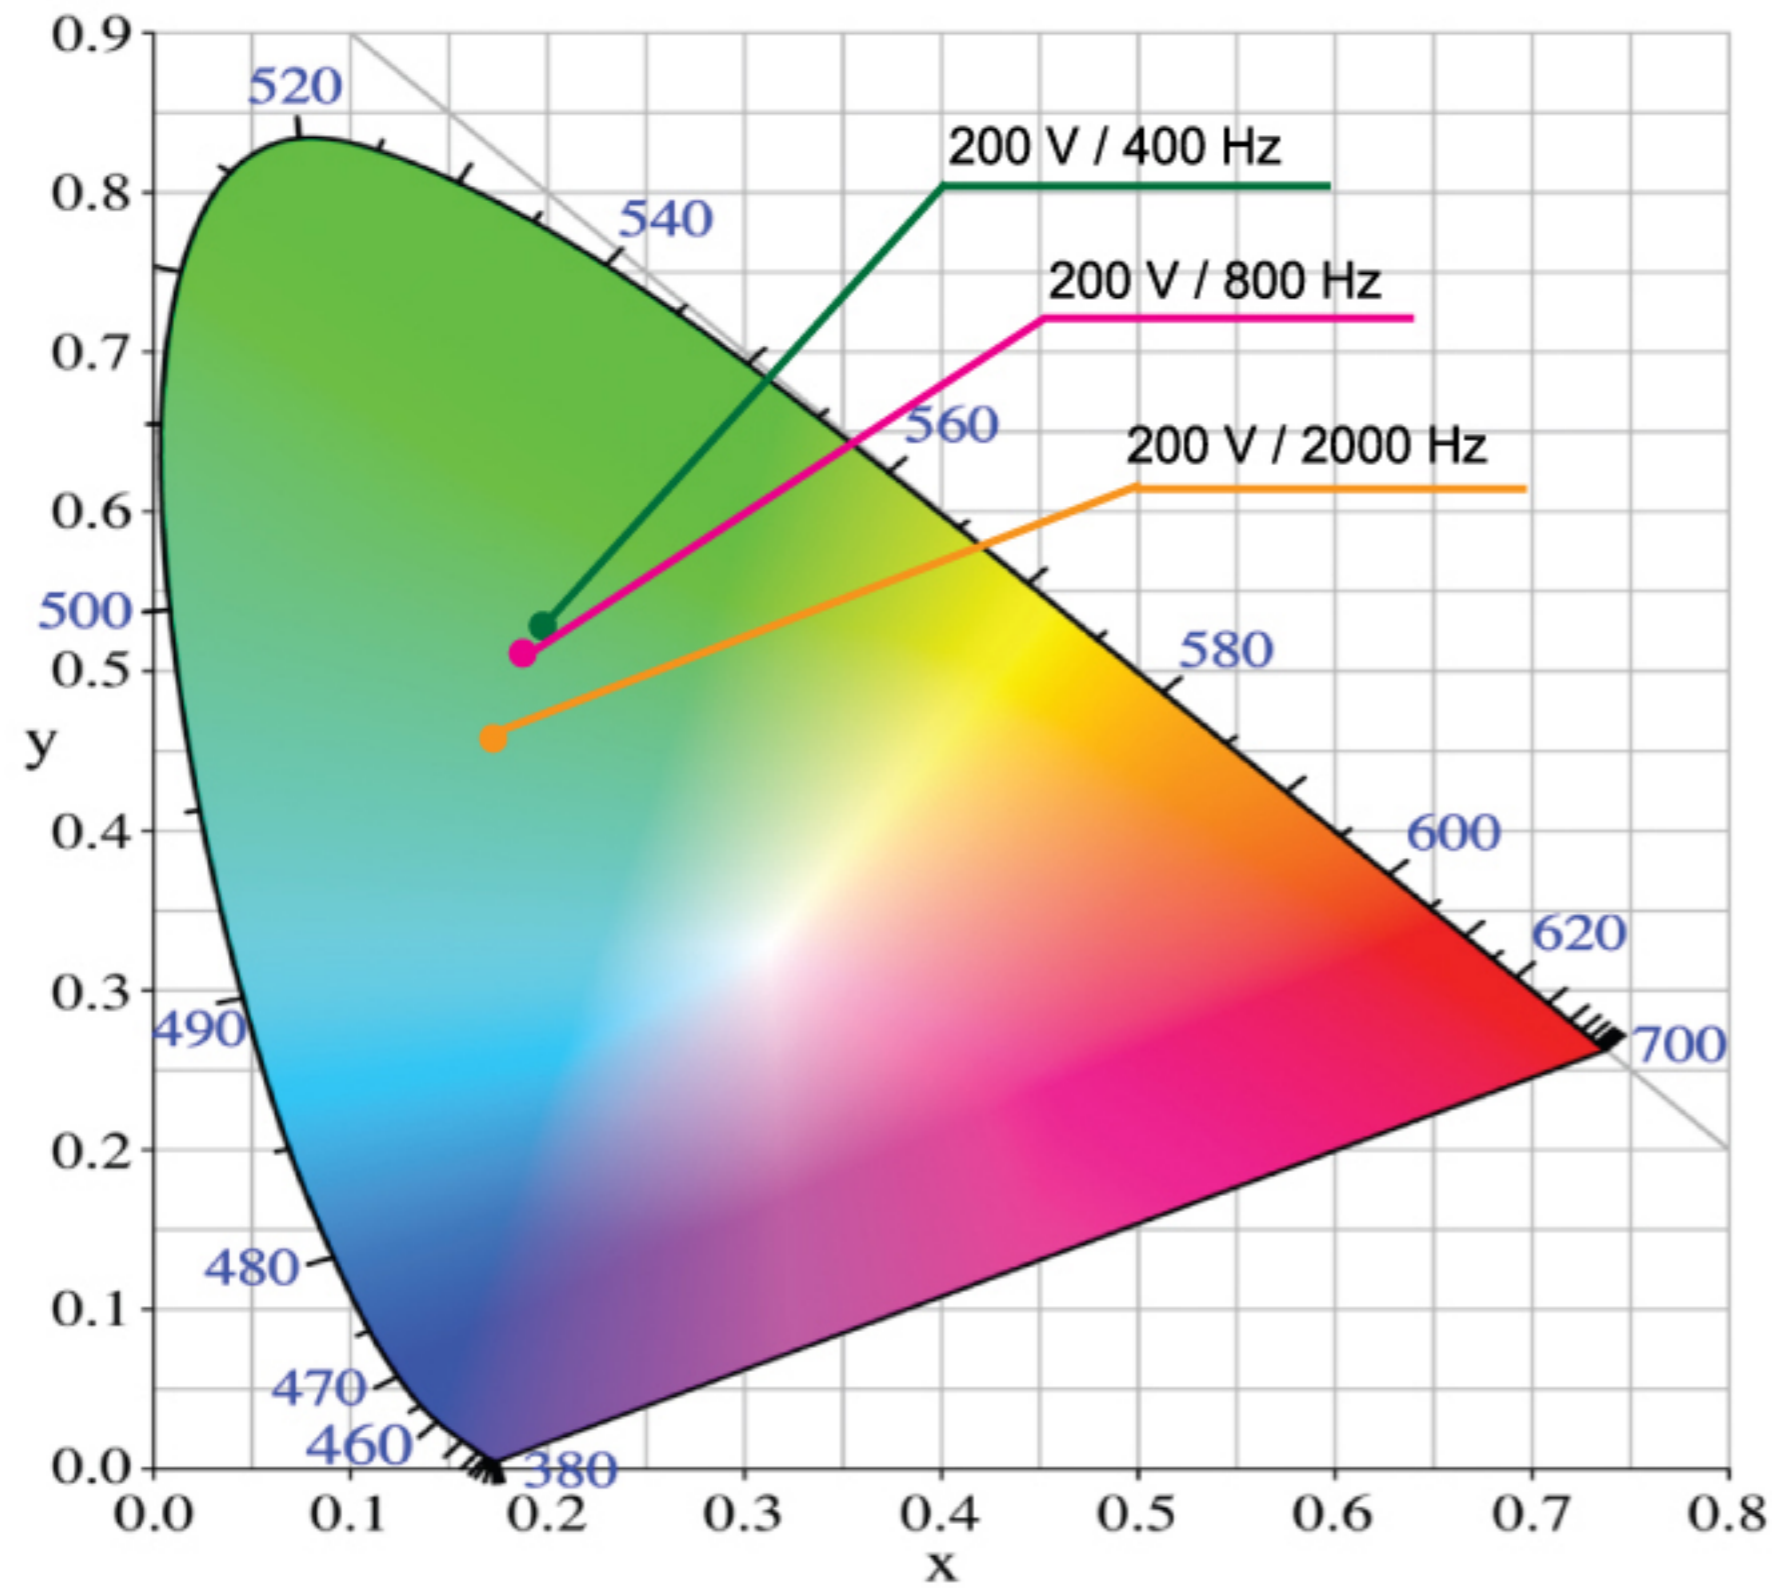

Typical Chromaticity Coordinates 冷光綫色度坐標

| Voltage 電壓<br>Frequency 電頻 | Chromaticity Coordinates 色度坐標 |       |
|----------------------------|-------------------------------|-------|
|                            | X                             | Y     |
| 200V / 400Hz               | 0.184                         | 0.532 |
| 200V / 800Hz               | 0.179                         | 0.507 |
| 200V / 2000Hz              | 0.171                         | 0.457 |

Fiber Spectrum at 200V/2000Hz 冷光綫光譜在 200伏/2000赫茲

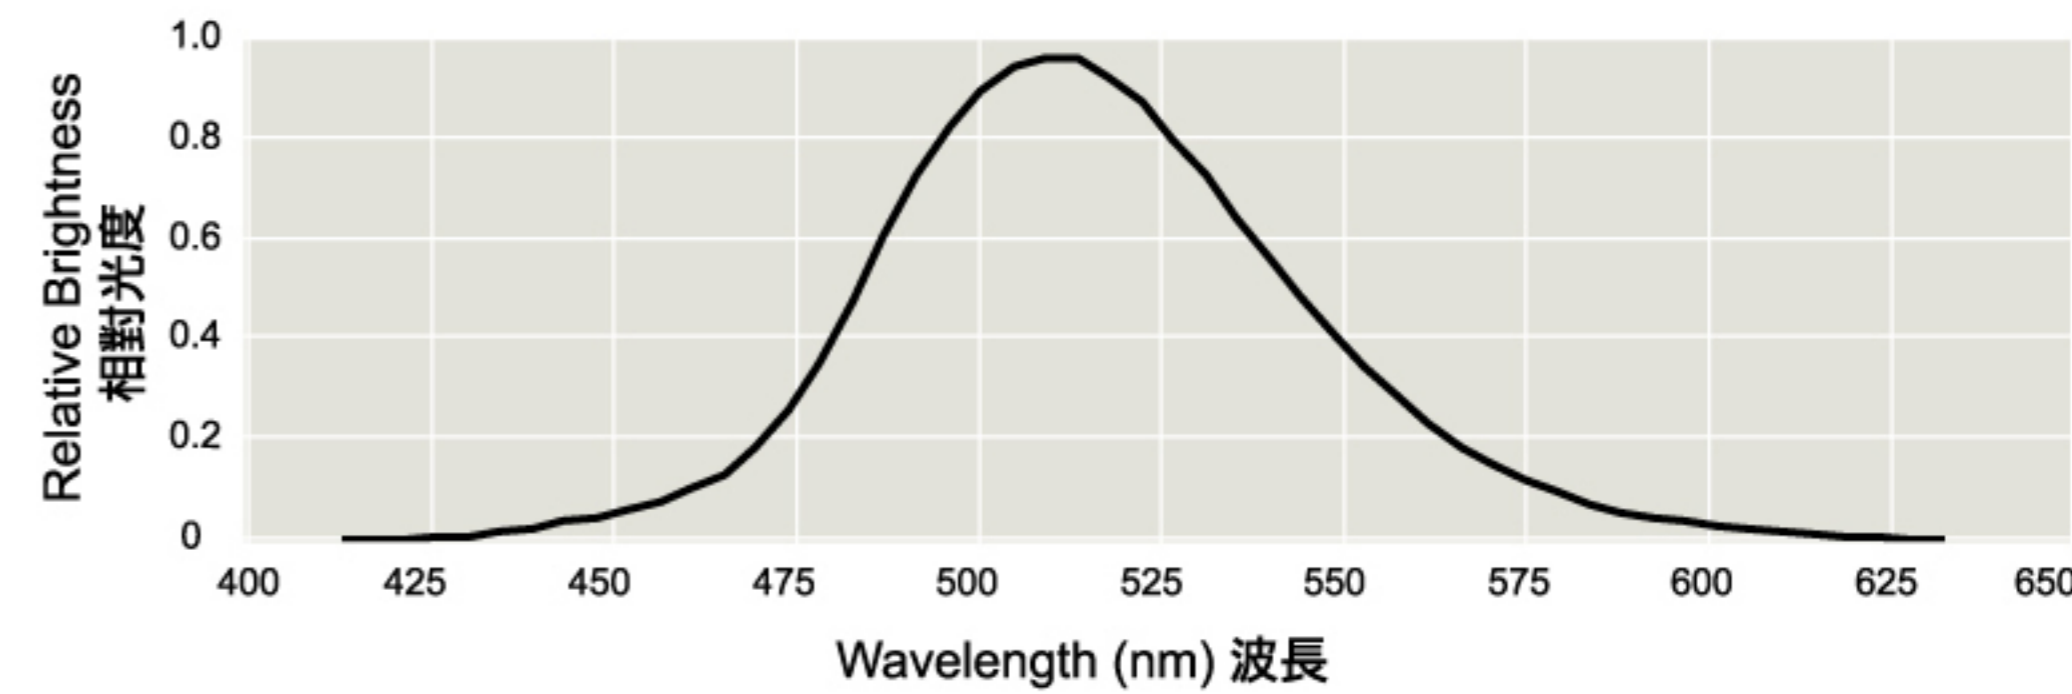

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

| V, 伏 | 200Hz | 400Hz | 800Hz | 2000Hz | 4000Hz |
|------|-------|-------|-------|--------|--------|
| 80V  | 0.6   | 0.8   | 1.4   | 2.0    | 2.2    |
| 120V | 3.5   | 6.2   | 9.8   | 15.4   | 19.2   |
| 160V | 10.2  | 17.4  | 29.0  | 45.0   | 55.0   |
| 200V | 20.0  | 34.0  | 51.5  | 84.5   | 120.2  |
| 240V | 36.0  | 50.2  | 82.8  | 137.2  | 186.0  |

Typical Initial Reference Brightness 冷光綫始光度參考值

